


ISOLATED DRIVERS


ISOLATED DRIVERS



P6170

Wattage -	4-7W (P6170)
Input Voltage -	100V-300V
Output Voltage -	22V - 42V
Output Current -	150mA
Efficiency -	≥ 75%
PFC -	> 0.6
Surge Protection -	Upto 3.5KV
Size(L*B*H) -	28.5*21.5*18mm
Application -	Led Panel, Downlight & COB

ISOLATED DRIVERS



P6127

Wattage -	4-7W (P6127)
Input Voltage -	100V-300V
Output Voltage -	6V - 18V
Output Current -	300mA
Efficiency -	≥ 80%
PFC -	> 0.5
Surge Protection -	Upto 3.5KV
Size(L*B*H) -	28.5*21.5*18mm
Application -	Led Panel, Downlight & COB


ISOLATED DRIVERS



P5026

Wattage -	3W (P5026)
Input Voltage -	85V-265V
Output Voltage -	6V - 11V
Output Current -	240mA
Efficiency -	$\geq 80\%$
PFC -	> 0.5
Surge Protection -	NA
Length(L*B*H) -	24*17*14mm
Application -	Panel Lights, Downlight, COB Lights

ISOLATED DRIVERS

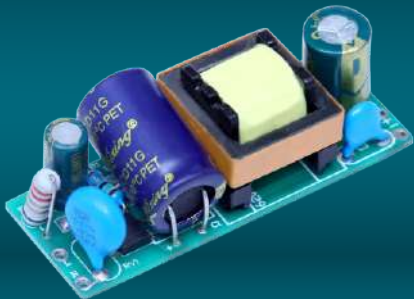

P5027

Wattage -	8-12W(P5027)
Input Voltage -	85V-300V
Output Voltage -	24V - 40V
Output Current -	300mA
Efficiency -	$\geq 85\%$
PFC -	> 0.5
Surge Protection -	Upto 2.5KV
Length(L*B*H) -	43.5*17.5*15.5mm
Application -	Panel Lights, Downlight, COB Lights

ISOLATED DRIVERS



P5028

Wattage -	12-18W(P5028)
Input Voltage -	85V-300V
Output Voltage -	36V - 60V
Output Current -	300mA
Efficiency -	$\geq 85\%$
PFC -	> 0.5
Surge Protection -	Upto 2.5KV
Length(L*B*H) -	51.5*23*15.5mm
Application -	Panel Lights, Downlight, COB Lights


ISOLATED DRIVERS



P5029

Wattage -	18-24W(P5029)
Input Voltage -	85V-300V
Output Voltage -	54V - 80V
Output Current -	300mA
Efficiency -	$\geq 88\%$
PFC -	> 0.5
Surge Protection -	Upto 2.5KV
Length(L*B*H) -	51.5*23*17(mm)
Application -	Panel Lights, Downlight, COB Lights

ISOLATED DRIVERS (HPF)

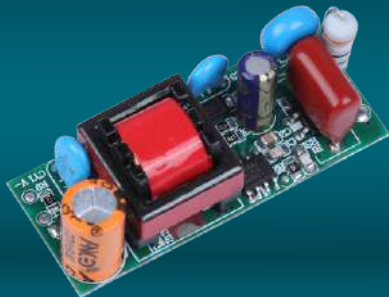

P6179

Wattage - 8-12W(P6179)

Input Voltage - 85V - 265V AC 50-60Hz

Output Voltage - 22V - 38V

Output Current - 300mA $\pm$ 5%

Efficiency - $\geq$ 88%

PFC - $>$ 0.95

THD - $<$ 10%

Surge Protection - Upto 3KV

Features - Short Circuit Protection, OVP,
Over Load Protection

Size(L*B*H) - 46*19*17mm

Application - Indoor Led Lighting

ISOLATED DRIVERS



P6180

Wattage - 12-18W(P6180)

Input Voltage - 85V - 265V AC 50-60Hz

Output Voltage - 34V - 56V

Output Current - 300mA $\pm$ 5%

Efficiency - $\geq$ 88%

PFC - $>$ 0.95

THD - $<$ 10%

Surge Protection - Up to 3KV

Features - Short Circuit Protection, OVP,
Over Load Protection

Length(mm) - 61.5*26*17mm

Application - Indoor Led Lighting

ISOLATED DRIVERS



P6181

Wattage - 18-24W(P6181)

Input Voltage - 85V - 265V AC 50-60Hz

Output Voltage - 52V - 74V

Output Current - 300mA $\pm$ 5%

Efficiency - $\geq$ 88%

PFC - $>$ 0.95

THD - $<$ 10%


Surge Protection - Upto 3KV

Features - Short Circuit Protection, OVP,
Over Load Protection

Length(mm) - 61.5*26*17mm

Application - Indoor Led Lighting

ISOLATED DRIVERS

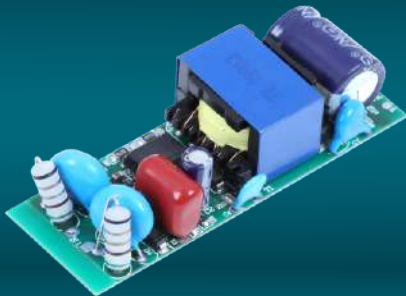

P6188

Wattage - 24-30W (P6188)

Input Voltage - 85V - 265V AC 50-60Hz

Output Voltage - 70V - 90V

Output Current - 300mA $\pm$ 5%

Efficiency - $\geq$ 85%

PFC - $>$ 0.95

THD - $<$ 10%

Surge Protection - Upto 4.5KV

Features - Short Circuit Protection,
Over Load Protection

Length(mm) - 64*24*18mm

Application - Indoor Led Lighting

ISOLATED DRIVERS



P6189

Wattage - 24-30W(P6189)

Input Voltage - 85V - 265V AC 50-60Hz

Output Voltage - 34V - 44V

Output Current - 600mA $\pm$ 5%

Efficiency - $\geq$ 85%

PFC - $>$ 0.95

THD - $<$ 10%

Surge Protection - Upto 4.5KV

Features - Short Circuit Protection,
Over Load Protection

Length(mm) - 64*24*18mm

Application - Indoor Led Lighting

ISOLATED DRIVERS



P6190

Wattage - 24-36W(P6190)

Input Voltage - 85V - 265V AC 50-60Hz

Output Voltage - 24V - 38V

Output Current - 900mA $\pm$ 5%

Efficiency - $\geq$ 85%

PFC - $>$ 0.95


THD - $<$ 10%

Surge Protection - Upto 4.5KV

Features - Short Circuit Protection,
Over Load Protection


Length(mm) - 64*24*18mm

Application - Indoor Led Lighting

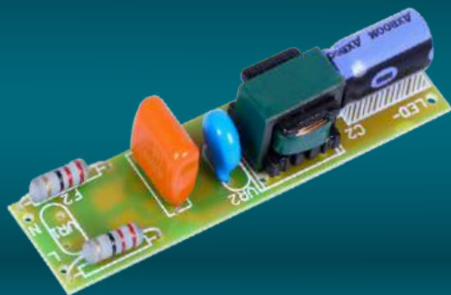

NON-ISOLATED DRIVERS

NON-ISOLATED DRIVERS

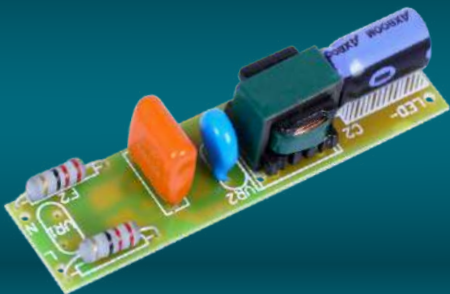

P6142

Wattage - 20W - 1 Mov (P6142)

Input Voltage - 100V-300V

Output Voltage - 35V - 80V

Output Current - 235mA

Efficiency - $\geq 85\%$

PFC - > 0.95


Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 67.5*16.5*13mm

Application - Led Tube Light & Profiles

NON-ISOLATED DRIVERS

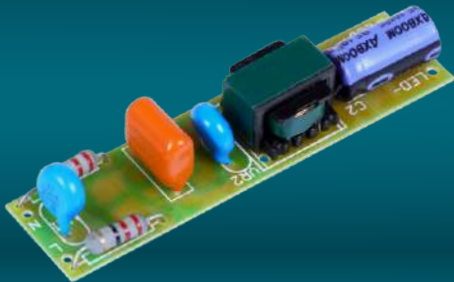

P4661

Wattage - 20W - 2 Mov (P4661)

Input Voltage - 100V-300V

Output Voltage - 35V - 80V

Output Current - 235mA

Efficiency - $\geq 85\%$

PFC - > 0.95


Surge Protection - Upto 3.5KV

THD - Less Than 15%

Length(mm) - 67.5*16.5*13mm

Application - Led Tube Light & Profiles

NON-ISOLATED DRIVERS

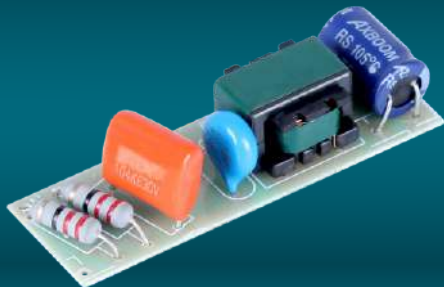

P6186

Wattage - 20W (P6186)

Input Voltage - 100V-300V

Output Voltage - 35V - 80V

Output Current - 235mA

Efficiency - $\geq 85\%$

PFC - > 0.95


Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 51*16.5*13mm

Application - Led Tube Light & Profiles

NON-ISOLATED DRIVERS

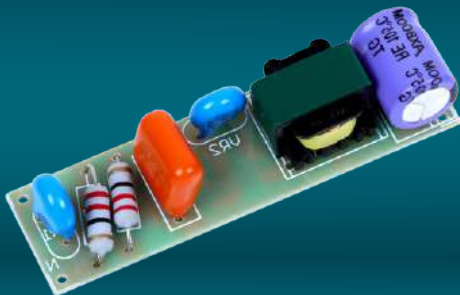

P6398

Wattage - 20W -2 Mov (P6398)

Input Voltage - 100V-300V

Output Voltage - 40V - 75V

Output Current - 240mA

Efficiency - $\geq 88\%$

PFC - > 0.95


Surge Protection - Upto 4KV

THD - Less Than 15%

Length(mm) - 58.5*16.5*13mm

Application - Led Tube Light & Profiles

NON-ISOLATED DRIVERS

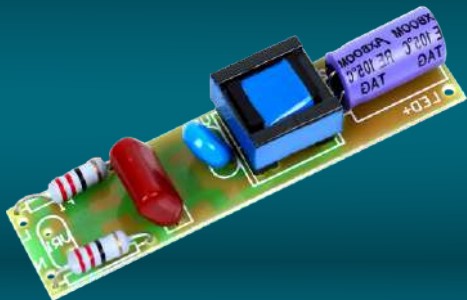

P6149

Wattage - 20W - EPC13 (P6149)

Input Voltage - 100V-300V

Output Voltage - 35V - 80V

Output Current - 235mA

Efficiency - $\geq 85\%$

PFC - > 0.95


Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 67.5*16.5*13mm

Application - Led Tube Light & Profiles

NON-ISOLATED DRIVERS

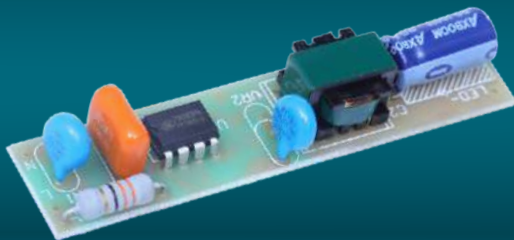

P4909

Wattage - 22W(P4909)

Input Voltage - 100V-300V

Output Voltage - 30V - 80V

Output Current - 260mA

Efficiency - $\geq 85\%$

PFC - > 0.95


Surge Protection - Upto 4KV

THD - Less Than 15%

Length(mm) - 74*17*13mm

Application - TubeLight, Profiles

NON-ISOLATED DRIVERS

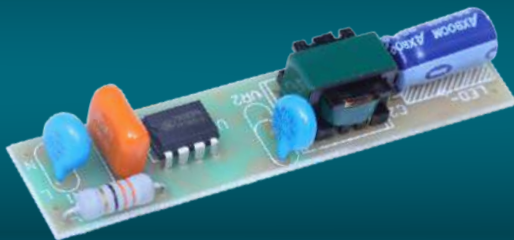

P4904

Wattage - 24W(P4904)

Input Voltage - 100V-300V

Output Voltage - 40V - 80V

Output Current - 300mA

Efficiency - $\geq 85\%$

PFC - > 0.95


Surge Protection - Upto 3.5KV

THD - Less Than 15%

Length(mm) - 74*17*13mm

Application - TubeLight, Profiles

NON-ISOLATED DRIVERS

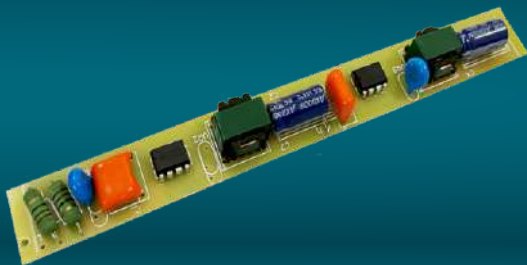

P5015

Wattage - 36W (P5015)

Input Voltage - 100V-300V

Output Voltage - 40V - 80V

Output Current - 470mA

Efficiency - $\geq 88\%$

PFC - > 0.95


Surge Protection - 4KV

THD - Less Than 15%

Length(mm) - 155*19.5*13.5mm

Application - TubeLight , Profiles

NON-ISOLATED DRIVERS

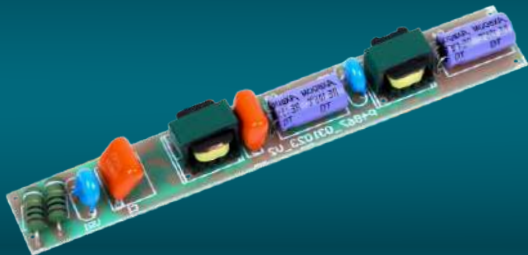

P6390

Wattage - 36W (P6390)

Input Voltage - 100V-300V

Output Voltage - 40V - 75V

Output Current - 470mA

Efficiency - $\geq 88\%$

PFC - > 0.95


Surge Protection - 4KV

THD - Less Than 15%

Length(mm) - 122*18*13mm

Application - TubeLight , Profiles

NON-ISOLATED DRIVERS



P2124

Wattage - 3-9W (P2124)

Input Voltage - 110V-300V

Output Voltage - 20V - 78V

Output Current - 120mA

Efficiency - $\geq 80\%$

PFC - > 0.95


Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 33*19.5*15mm

Application - Bulb, Downlight

NON-ISOLATED DRIVERS

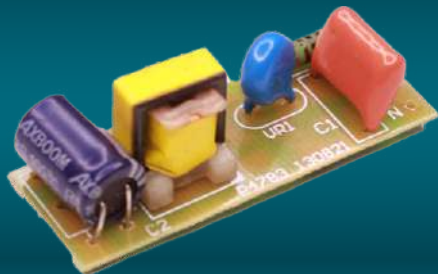

P4826

Wattage - 5-10W (P4826)

Input Voltage - 100V-300V

Output Voltage - 20V - 78V

Output Current - 120mA

Efficiency - $\geq 80\%$

PFC - > 0.95


Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 44.5*16.5*15mm

Application - Tube Light

NON-ISOLATED DRIVERS

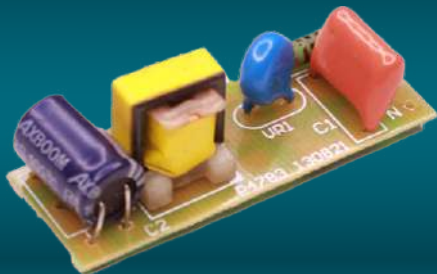

P6294

Wattage - 5-10W (P6294)

Input Voltage - 100V-300V

Output Voltage - 60V - 75V

Output Current - 60mA

Efficiency - $\geq 75\%$

PFC - > 0.95


Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 44.5*16.5*15mm

Application - Tube Light

NON-ISOLATED DRIVERS

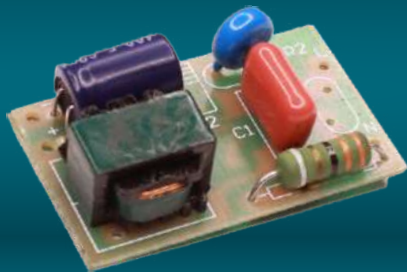

P4834

Wattage - 8-15W (P4834)

Input Voltage - 100V-300V

Output Voltage - 24V - 48V

Output Current - 300mA

Efficiency - $\geq 80\%$

PFC - > 0.95

Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 39*24*13mm

Application - LED Panel, Downlight, COB Light

NON-ISOLATED DRIVERS



P5003

Wattage - 8-15W (P5003)

Input Voltage - 100V-300V

Output Voltage - 40V - 75V

Output Current - 220mA

Efficiency - $\geq 88\%$

PFC - > 0.95


Surge Protection - Upto 3.5KV

THD - Less Than 15%

Length(mm) - 39*24*13mm

Application - PC Panels, DownLight.

NON-ISOLATED DRIVERS

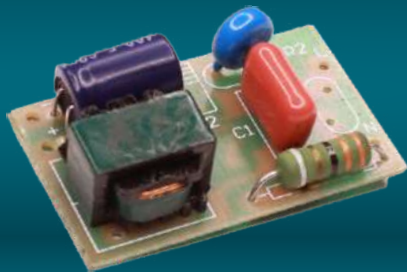

P6368

Wattage - 8-15W (P6368)

Input Voltage - 100V-300V

Output Voltage - 24V - 72V

Output Current - 280mA

Efficiency - $\geq 85\%$

PFC - > 0.95

Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 39*24*13mm

Application - LED Panel, Downlight, COB Light

NON-ISOLATED DRIVERS



P6369

Wattage - 8-15W (P6369)

Input Voltage - 100V-300V

Output Voltage - 24V - 72V

Output Current - 280mA

Efficiency - $\geq 85\%$

PFC - > 0.95

Surge Protection - Upto 3.5KV

THD - Less Than 15%

Length(mm) - 39*24*13mm

Application - LED Panel, Downlight, COB Light

NON-ISOLATED DRIVERS



P6122

Wattage - 8-24W - 1 Mov (P6122)

Input Voltage - 100V-300V

Output Voltage - 24V - 80V

Output Current - 300mA

Efficiency - $\geq 85\%$

PFC - > 0.95

Surge Protection - Upto 3.5KV

THD - Less Than 15%

Length(mm) - 44.5*25.5*13mm

Application - LED Panel, Downlight, COB Light

NON-ISOLATED DRIVERS



P6143

Wattage - 8-24W - 2 Mov (P6143)

Input Voltage - 100V-300V

Output Voltage - 24V - 80V

Output Current - 300mA

Efficiency - $\geq 85\%$

PFC - > 0.95


Surge Protection - Upto 4KV

THD - Less Than 15%

Length(mm) - 44.5*25.5*15mm

Application - LED Panel, Downlight, COB Light

NON-ISOLATED DRIVERS(LPF)



P5030

Wattage - 8-24W (P5030)

Input Voltage - 110V-290V

Output Voltage - 24V - 80V

Output Current - 300mA

Efficiency - $\geq 92\%$

PFC - > 0.5

Surge Protection - Upto 2.5KV

Length(mm) - 29.5*21*15(mm)

Application - Panel Lights, Downlights,
COB Lights

NON-ISOLATED DRIVERS(LPF)



P5031

Wattage - 6-15W (P5031)

Input Voltage - 110V-290V

Output Voltage - 21V - 48V

Output Current - 300mA

Efficiency - $\geq 92\%$

PFC - > 0.5

Surge Protection - Upto 2.5KV

Length(mm) - 29.5*21*14(mm)

Application - Panel Lights, Downlights,
COB Lights

NON-ISOLATED DRIVERS(LPF)



P5032

Wattage - 8-18W (P5032)

Input Voltage - 110V-290V

Output Voltage - 50V - 120V

Output Current - 150mA

Efficiency - $\geq 92\%$


PFC - > 0.5

Surge Protection - Upto 2.5KV

Length(mm) - 17.3*24.3*13.5(mm)

Application - Panel Lights, Downlights, COB Lights

NON-ISOLATED DRIVERS

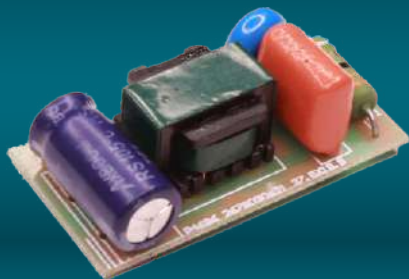

P4703

Wattage - 20W (P4703)

Input Voltage - 85V-300V

Output Voltage - 40V - 80V

Output Current - 240mA

Efficiency - $\geq 88\%$

PFC - > 0.95


Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 38*20*13(mm)

Application - Tube Light, Side Cap

NON-ISOLATED DRIVERS

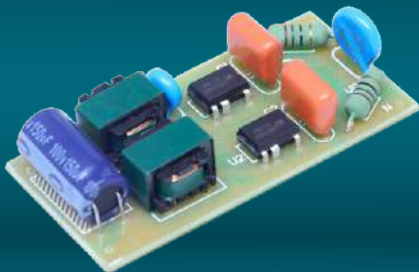

P5091

Wattage - 36-50W (P5091)

Input Voltage - 100V-300V

Output Voltage - 40V - 80V

Output Current - 560mA

Efficiency - $\geq 88\%$


PFC - > 0.95

Surge Protection - Upto 3.5KV

THD - Less Than 15%


Length(mm) - 68*33*15(mm)

Application - Indoor Lights

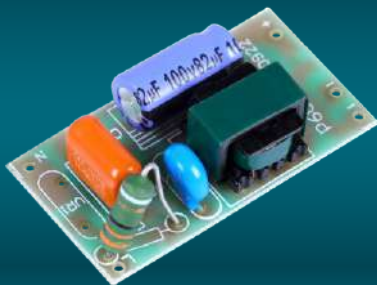

3 IN 1 CCT CHANGING PANEL DRIVER

ISOLATED DRIVERS (LPF)

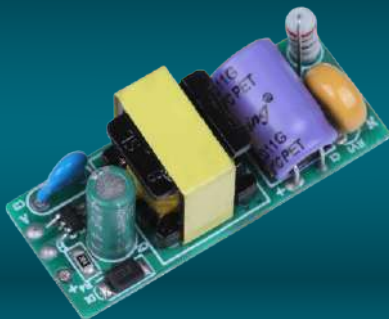

P6182

Wattage - 4-7W(P6182)

Input Voltage - 85V - 265V AC 50-60Hz

Output Voltage - 52V - 74V

Output Current - 300mA $\pm$ 5%

Efficiency - $\geq$ 88%

PFC - $>$ 0.95

THD - $<$ 10%


Surge Protection - Up to 3KV

Features - Short Circuit Protection, OVP,
Over Load Protection

Length(mm) - 61.5*26*17mm

Application - Indoor Led Lighting

NON-ISOLATED DRIVERS (LPF)

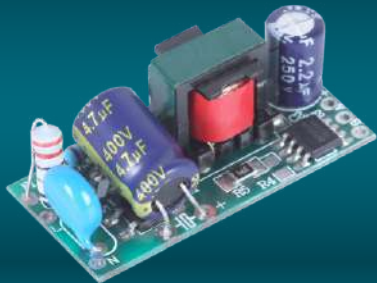

P6183

Wattage - 8-18W 3 in 1 (P6183)

Input Voltage - 175V - 265V

Output Voltage - 24V - 60V

Output Current - 300mA

Efficiency - $\geq 88\%$

PFC - > 0.5

Surge Protection - Upto 2.5KV

Length(mm) - 36.8*17*13.5mm

Application - Panel Lights, Downlights,
COB Lights

NON-ISOLATED DRIVERS (LPF)



P6184

Wattage - 18-24W 3 in 1 (P6184)

Input Voltage - 175V - 265V

Output Voltage - 54V - 75V

Output Current - 300mA

Efficiency - $\geq 88\%$


PFC - > 0.5

Surge Protection - Upto 2.5KV

Length(mm) - 37*24*13.6mm

Application - Panel Lights, Downlights,
COB Lights

NON-ISOLATED DRIVERS

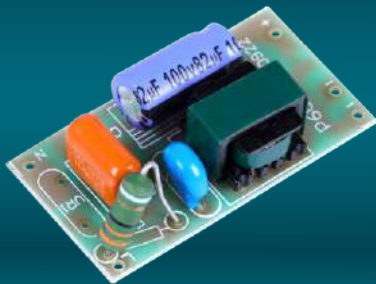

P6110

Wattage - 8-15W- 3 in 1 (P6110)

Input Voltage - 100V-300V

Output Voltage - 24V - 48V

Output Current - 300mA

Efficiency - $\geq 85\%$

PFC - > 0.95

Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 44.25*24.15*13mm

Application - LED Panel, Downlight, COB Light

NON-ISOLATED DRIVERS



P4872

Wattage - 8-24W 3 in 1 (P4872)

Input Voltage - 100V-300V

Output Voltage - 24V - 78V

Output Current - 300mA

Efficiency - $\geq 85\%$


PFC - > 0.95

Surge Protection - Upto 3KV

THD - Less Than 15%


Length(mm) - 45.*24*15mm

Application - LED Panel, Downlight, COB Light

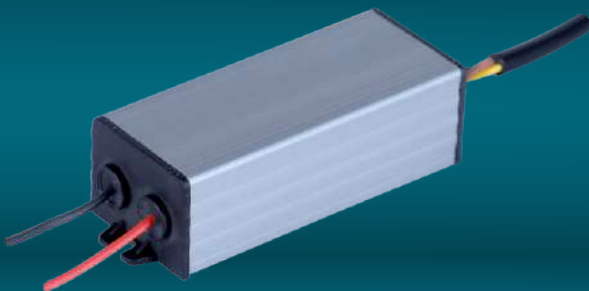

POTTED ISOLATED DRIVERS

ISOLATED DRIVERS

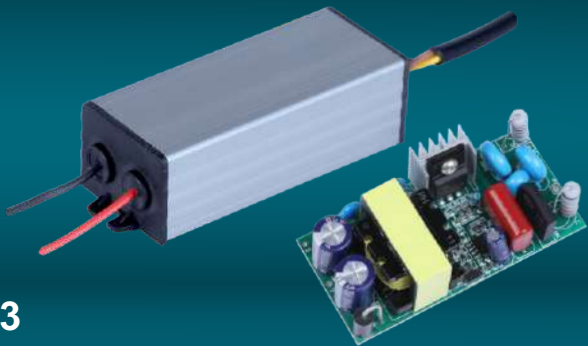

P6173

Wattage - 50W EE28 (P6173)

Input Voltage - 100V - 320V AC 50-60Hz

Output Voltage - 28V - 35V

Output Current - 1500mA $\pm$ 5%

Efficiency - $\geq$ 85%

PFC - $>$ 0.95

THD - $<$ 10%

Surge Protection - 6KV

Features - Short Circuit Protection, OVP,
Over Load Protection


Over Temperature Protection - 105°C

Cutoff Over Voltage Protection - 310V AC

Size (Open Circuit) (L*B*H*) - 70.*33*22mm / 81.*37*27mm

Applications - Indoor / Outdoor LED Lighting

ISOLATED DRIVERS

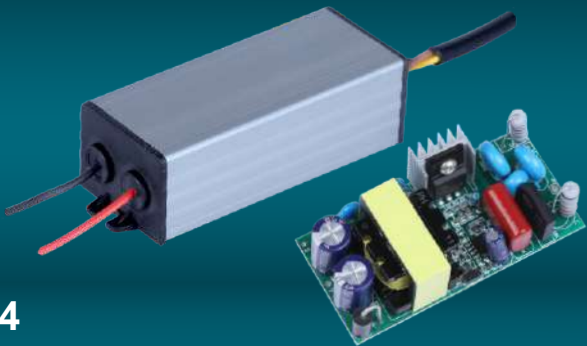

P6174

Wattage - 50W EE28 (P6174)

Input Voltage - 100V - 320V AC 50-60Hz

Output Voltage - 28V - 35V

Output Current - 750mA $\pm$ 5%

Efficiency - $\geq$ 85%

PFC - $>$ 0.95

THD - $<$ 10%

Surge Protection - 6KV

Features - Short Circuit Protection, OVP,
Over Load Protection


Over Temperature Protection - 105°C

Cutoff Over Voltage Protection - 310V AC

Size (Open Circuit) (L*B*H*) - 70.*33*22mm / 81.*37*27mm

Applications - Indoor / Outdoor LED Lighting

ISOLATED DRIVERS

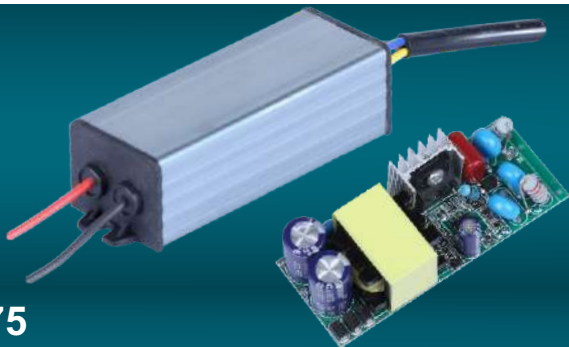

P6175

Wattage - 50W EE22*13 (P6175)

Input Voltage - 100V - 320V AC 50-60Hz

Output Voltage - 28V - 35V

Output Current - 1500mA $\pm$ 5%

Efficiency - $\geq$ 85%

PFC - $>$ 0.95

THD - $<$ 10%

Surge Protection - 4KV

Features - Short Circuit Protection, OVP,
Over Load Protection


Over Temperature Protection - 105°C

Cutoff Over Voltage Protection - 320V AC

Size (Open Circuit) (L*B*H*) - 64*27*18mm / 78*36*24

Applications - Indoor / Outdoor LED Lighting

ISOLATED DRIVERS

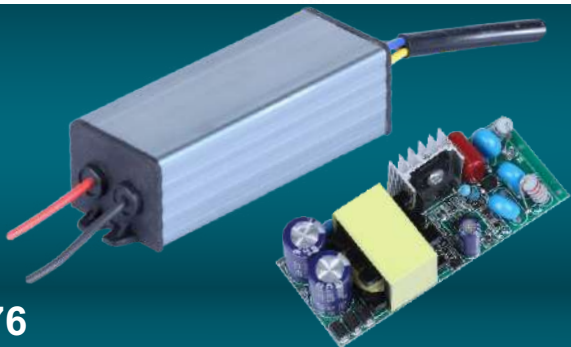

P6176

Wattage - 50W EE22*13 (P6176)

Input Voltage - 100V - 320V AC 50-60Hz

Output Voltage - 28V - 35V

Output Current - 750mA $\pm$ 5%

Efficiency - $\geq$ 85%

PFC - $>$ 0.95

THD - $<$ 10%

Surge Protection - 4KV

Features - Short Circuit Protection, OVP,
Over Load Protection

Over Temperature Protection - 105°C

Cutoff Over Voltage Protection - 320V AC

Size (Open Circuit) (L*B*H*) - 64*27*18mm / 78*36*24

Applications - Indoor / Outdoor LED Lighting



Panel Light Kit



SLIM 4W ROUND(P3269) & 4W SQUARE (P3270) LED PANEL LIGHT SKD

Housing Details

- Material - Aluminum Casting + Plastic
- Dimension - Outer- 4W RD- Dia 85mm
4W SQ-85*85mm
Cutout- 4W RD- Dia 65mm
4W SQ-65*65mm
- Per Set - Housing Face + Diffuser + LGP +
Reflector Paper + Back Plate +
Foam + Screws + Springs +
Connector Wire Set

LED on PCB Details

- Material - Flexible
- Size - 4W RD-179*6mm
4W SQ-212*6mm
- Combination - 5P4S (20LED)

Driver Details

- Wattage - 1-7W (P3317)
- Output Voltage - 3V-23V
- Output Current - 300mA
- Eff - $\geq 75\%$
- PF - > 0.50
- Surge Protection - 3.5kv



SLIM 8W ROUND(P2170) & 8W SQUARE (P2171) LED PANEL LIGHT SKD

Housing Details

- Material - Aluminum Casting + Plastic
- Dimension - Outer- 8W RD- Dia 120mm
8W SQ-120*120mm
Cutout- 8W RD- Dia 100mm
8W SQ-100*100mm
- Per Set - Housing Face + Diffuser + LGP +
Reflector Paper + Back Plate + Foam +
Screws + Springs + Connector Wire Set

LED on PCB Details

- Material - Flexible
- Size - 8W RD-288*6mm
8W SQ-331*6mm
- Combination - 5P8S (40LED)

Driver Details

- Wattage - 8-24W (P3325)
- Output Voltage - 16V-90V
- Output Current - 300mA
- Eff - $\geq 88\%$
- PF - > 0.95
- Surge Protection - 4kv



SLIM 12W ROUND(P2172) & 12W SQUARE (P2173) LED PANEL LIGHT SKD

Housing Details

- Material - Aluminum Casting + Plastic
- Dimension - Outer- 12W RD- Dia 145mm
12W SQ-145*145mm
Cutout- 12W RD- Dia 125mm
12W SQ-125*125mm
- Per Set - Housing Face + Diffuser + LGP +
Reflector Paper + Back Plate + Foam +
Screws + Springs + Connector Wire Set

LED on PCB Details

- Material - Flexible
- Size - 12W RD-366*6mm
12W SQ-448*6mm
- Combination - 5P12S (60LED)

Driver Details

- Wattage - 8-24W (P3325)
- Output Voltage - 16V-90V
- Output Current - 300mA
- Eff - $\geq 88\%$
- PF - > 0.95
- Surge Protection - 4kv



SLIM 15W ROUND(P2174) & 15W SQUARE (P2175) LED PANEL LIGHT SKD

Housing Details

- Material - Aluminum Casting + Plastic
- Dimension - Outer- 15W RD- Dia 170mm
15W SQ-170*170mm
Cutout- 15W RD- Dia 145mm
15W SQ-145*145mm
- Per Set - Housing Face + Diffuser + LGP +
Reflector Paper + Back Plate + Foam +
Screws + Springs + Connector Wire Set

LED on PCB Details

- Material - Flexible
- Size - 15W RD-438*6mm
15W SQ-525*6mm
- Combination - 5P15S (75LED)

Driver Details

- Wattage - 8-24W (P3325)
- Output Voltage - 16V-90V
- Output Current - 300mA
- Eff - $\geq 88\%$
- PF - > 0.95
- Surge Protection - 4kv



SLIM 18W ROUND(P2176) & 18W SQUARE (P2177) LED PANEL LIGHT SKD

Housing Details

- Material - Aluminum Casting + Plastic
- Dimension - Outer- 18W RD- Dia 200mm
18W SQ-200*200mm
Cutout- 18W RD- Dia 175mm
18W SQ-175*175mm
- Per Set - Housing Face + Diffuser + LGP +
Reflector Paper + Back Plate + Foam +
Screws + Springs + Connector Wire Set

LED on PCB Details

- Material - Flexible
- Size - 18W RD-527*6mm
18W SQ-640*6mm
- Combination - 5P18S (90LED)

Driver Details

- Wattage - 8-24W (P3325)
- Output Voltage - 16V-90V
- Output Current - 300mA
- Eff - $\geq 88\%$
- PF - > 0.95
- Surge Protection - 4kv



SLIM 22W ROUND(P2178) & 22W SQUARE (P2179) LED PANEL LIGHT SKD

Housing Details

- Material - Aluminum Casting + Plastic
- Dimension - Outer- 22W RD- Dia 225mm
22W SQ-225*225mm
Cutout- 22W RD- Dia 195mm
22W SQ-195*195mm
- Per Set - Housing Face + Diffuser + LGP +
Reflector Paper + Back Plate +Foam +
Screws + Springs + Connector Wire Set

LED on PCB Details



- Material - Flexible
- Size - 22W RD-527*6mm
22W SQ-640*6mm
- Combination - 5P22S (110LED)

Driver Details

- Wattage - 8-24W (P3325)
- Output Voltage - 16V-90V
- Output Current - 300mA
- Eff - $\geq 88\%$
- PF - > 0.95
- Surge Protection - 4kv



Tube Light Kit

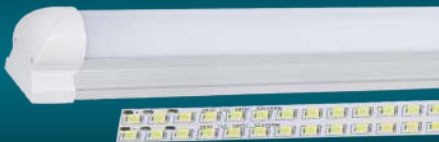

Type - 1ft Wall T8 / Batten T8 SKD (P2065)

Housing Details

Material - Aluminum + PC

Length - 300mm

Per Set - Base + PC Cover + Side Caps +
Small Caps + Clips + Screw +
Side Cap Screws

LED on PCB Details

Material - MC and FR

Size - 295*9.5 (2pcs)

Combination - 12s2p(24LED)

Driver Details



Wattage - 10w

Output Current - 240mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv

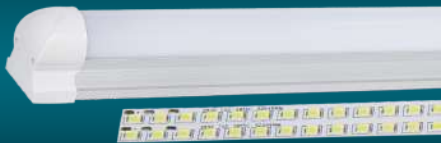

Type - 2ft Wall T8 / Batten T8 SKD (P2064)

Housing Details

Material - Aluminum + PC

Length - 600mm

Per Set - Base + PC Cover + Side Caps +
Clips + Screws

LED on PCB Details

Material - MC and FR

Size - 585*9.5 (2pcs)

Combination - 24s2p(48led)

Driver Details


Wattage - 20w

Output Current - 240mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv



Type - 2ft T8 Square Powder Coated SKD (P3447)

Housing Details

Material - Aluminum + PC

Length - 600mm

Per Set - Base + PC Cover + Side Caps +
Clips + Screws

LED on PCB Details

Material - MC

Size - 585*9.5

Combination - 25s4p(100led)

Driver Details



Wattage - 20w

Output Current - 240mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv

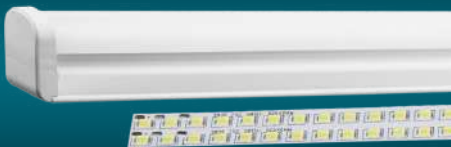

Type - 4ft T5 Round Plastic SKD (P611)

Housing Details

Material - Polycarbonate(PC)

Length - 1200mm

Per Set - PC Base + PC Cover + Side Caps +
Clips + Screws

LED on PCB Details

Material - MC and FR

Size - 1170*9.5

Combination - 25s4p(100led)

Driver Details


Wattage - 20w

Output Current - 240mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv



Type - 1ft T5 Square Plastic SKD (P3361)

Housing Details

Material - Polycarbonate(PC)

Length - 300mm

Per Set - PC Base + PC Cover + Side Caps +
Clips + Screws

LED on PCB Details

Material - MC and FR

Size - 295*5.7

Combination - 12s2p(24LED)

Driver Details


Wattage - 10w

Output Current - 120mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 2.5kv



Type - 2ft T5 Square Plastic SKD (P697)

Housing Details

Material - Polycarbonate(PC)

Length - 600mm

Per Set - PC Base + PC Cover + Side Caps +
Clips + Screws

LED on PCB Details

Material - MC and FR

Size - 570*5.7

Combination - 24s2p(48led)

Driver Details


Wattage - 10w

Output Current - 120mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv



Type - 4ft T5 Square Plastic SKD (P610)

Housing Details

Material - Polycarbonate(PC)

Length - 1200mm

Per Set - PC Base + PC Cover + Side Caps +
Clips + Screws

LED on PCB Details

Material - MC and FR

Size - 1170*5.7

Combination - 25s2p(100led)

Driver Details


Wattage - 20w

Output Current - 240mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv



Type - 2ft T5 Square SKD (P77)

Housing Details

Material - Aluminum + PC

Length - 600mm

Per Set - Base + PC Cover + Side Caps +
Clips + Screws

LED on PCB Details

Material - MC and FR

Size - 585*9.5

Combination - 25s2p(50led)

Driver Details


Wattage - 10w

Output Current - 120mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv

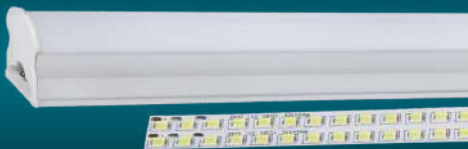

Type - 2ft T5 Round SKD (P68 / P69)

Housing Details

Material - Aluminum + PC

Length - 600mm

Per Set - Base + PC Cover + Side Caps +
Clips + Screw

LED on PCB Details

Material - MC and FR

Size - 585*9.5

Combination - 25s2p(50led)

Driver Details


Wattage - 10w

Output Current - 120mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv



Type - 4ft T5 Round Powder Coated SKD (P2201)

Housing Details

Material - Aluminum + PC

Length - 1200mm

Per Set - Base + PC Cover + Side Caps +
Clips + Screw

LED on PCB Details

Material - MC and FR

Size - 585*9.5

Combination - 25s4p(100led) or 24s5p(120led)

Driver Details


Wattage - 20w or 24w

Output Current - 240mA or 300mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv



Type - 4ft T8 Square Powder Coated SKD (P2202)

Housing Details

Material - Aluminum + PC

Length - 1175 mm

Per Set - Base + PC Cover + Side Caps +
Clips + Screws

LED on PCB Details

Material - MC

Size - 1170*9.5

Combination - 25s8p(200led)

Driver Details


Wattage - 36w

Output Current - 450mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv



Type - 4ft Wall T8 / Batten T8 SKD (P92 / P93)

Housing Details

Material - Aluminum + PC

Length - 1200mm

Per Set - Base + PC Cover + Side Caps +
Small Caps + Clips + Screw +
Side Cap Screws

LED on PCB Details

Material - MC and FR

Size - 1170*9.5 (2pcs)

Combination - 25s4p(100led)

Driver Details



Wattage - 36w

Output Current - 450mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv

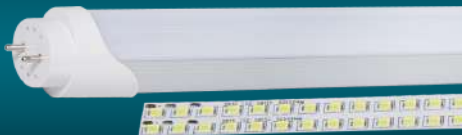

Type - 2ft T8 Retro SKD (P82)

Housing Details

Material - Aluminum + PC

Length - 585mm

Per Set - Base + PC Cover + Side Caps +
Pin Protector

LED on PCB Details

Material - MC

Size - 563*9.5

Combination - - 12s4p(48led)

Driver Details



Wattage - 10w

Output Current - 240mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv



Type(20w/24w) - 4ft T5 Square SKD (P3368)

Housing Details

Material - Aluminum + PC

Length - 1200mm

Per Set - Base + PC Cover + Side Caps +
Clips + Screws

LED on PCB Details

Material - MC and FR

Size - 1170*9.5

Combination - 25s4p(100led) or 24s5p(120led)

Driver Details



Wattage - 20w or 24w

Output Current - 240mA or 300mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv

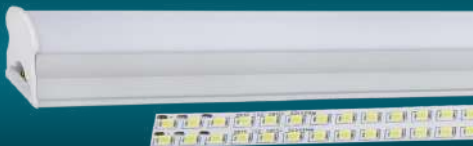

Type(20w/24w) - 4ft T5 Round SKD (P2080 / P3367)

Housing Details

Material - Aluminum + PC

Length - 1200mm

Per Set - Base + PC Cover + Side Caps + Clips +
Screws + (Wire Connector +
Middle Connector)*

LED on PCB Details

Material - MC and FR

Size - 1170*9.5

Combination - 25s4p(100led) or 24s5p(120led)

Driver Details

Wattage - 20w or 24w

Output Current - 240mA or 300mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv



Type - 4ft T8 Retro SKD (P918)

Housing Details

Material - Aluminum + PC

Length - 1200mm

Per Set - Base + PC Cover + Side Caps +
Pin Protector

LED on PCB Details

Material - MC and FR

Size - 1170*9.5

Combination - 25s4p(100led)

Driver Details

Wattage - 18w or 20w

Output Current - 215mA or 240mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv



Type - 4ft T8 Retro Plastic SKD (P67)

Housing Details

Material - Polycarbonate(PC)

Length - 1185mm

Per Set - Base + PC Cover + Side Caps +
Pin Protector

LED on PCB Details

Material - MC and FR

Size - 1170*9.5

Combination - 25s4p(100led)

Driver Details


Wattage - 18w

Output Current - 215mA

Eff - $\geq 88\%$

PF - > 0.95

Surge Protection - upto 3.5kv



Type - PLL SKD (P1925)

Housing Details

Material - Aluminum + PC

Length - 395mm

Per Set - Base + PC Cover + Side Caps + Screws

LED on PCB Details

Material - MC

Size - 391*26

Combination - 25s4p(100led)

Driver Details


Wattage - 18w

Output Current - 215mA

Eff - $\geq 88\%$


PF - > 0.95

Surge Protection - upto 3.5kv



**2835 NATION STAR
SMD LED**

NATION STAR SMD LED



2835 SMD LED

- Led Details - 2835 Package
- LED Make - Nation Star
- LED Specifications - 2.9V ~ 3.1V 60mA (0.2w)
9V ~ 9.1V 100mA (1w)
- Lumens (Lms) - 26-28LM / 28-30LM (0.2w)
135LM – 145LM (1w)
- CCT - 3000K / 4500K / 6500k / 7000K / 7500k
- Dimensions - (L x W) 2.8mm x 3.5mm
- Max Current Limit - 75ma (0.2w)
120ma (1w)
- Typical Current - 60mA (0.2w)
100mA (1w)
- Application - Led Batten / Downlights/ Led Flood Lights / Led Street Lights



SOUND IC SOLUTION

SOUND IC SOLUTION



SOUND IC SOLUTION

- Product Descriptions - SMD IC Electronic Doorbell Design
- Sound Tune - Single Tune / 3 in 1 Tunes / MultiTune / Vocals
- Operation Power - AC / DC
 - AC Power - 230V 50Hz AC
 - DC Power - 3.0V DC [2 X AA BATTERIES 1.5V]
- Trigger Function - 230V AC
- Features - Low Leakage Current in sleep mode. Tune rings only once even after continuous or uninterrupted supply at 230 V ac.
- Customized Tunes Possible With M.O.Q.



LED Lighting Solutions



+91 8655 500032



+91 8655 500031



sales.lightronics@gmail.com



www.lightronics.in



Gala No. 9,
Real Industrial Estate No. 5,
Sativali, Vasai East, 401208