


3 IN 1 CCT CHANGING PANEL DRIVER

ISOLATED DRIVERS (LPF)

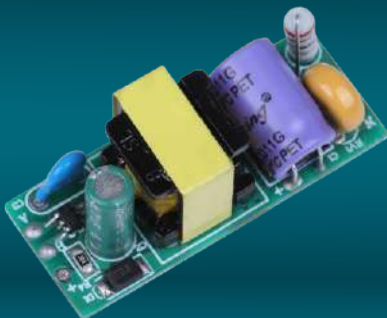

P6182

Wattage - 4-7W 3 in 1 (P6182)

Input Voltage - 85V - 265V

Output Voltage - 12V - 24V

Output Current - 300mA \pm 5%

Efficiency - \geq 80%


PFC - $>$ 0.5

Surge Protection - Upto 2.5KV

Length(mm) - 38*15.4*13mm

Application - Led Panel, Downlight

NON-ISOLATED DRIVERS (LPF)

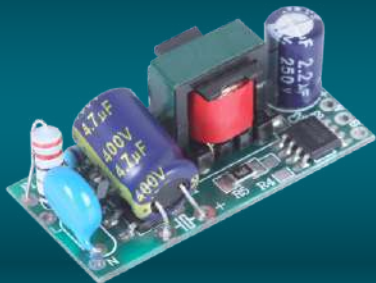

P6183

Wattage - 8-18W 3 in 1 (P6183)

Input Voltage - 175V - 265V

Output Voltage - 24V - 60V

Output Current - 300mA

Efficiency - $\geq 88\%$

PFC - > 0.5

Surge Protection - Upto 2.5KV

Length(mm) - 36.8*17*13.5mm

Application - Panel Lights, Downlights,
COB Lights

NON-ISOLATED DRIVERS (LPF)



P6184

Wattage - 18-24W 3 in 1 (P6184)

Input Voltage - 175V - 265V

Output Voltage - 54V - 75V

Output Current - 300mA

Efficiency - $\geq 88\%$


PFC - > 0.5

Surge Protection - Upto 2.5KV

Length(mm) - 37*24*13.6mm

Application - Panel Lights, Downlights,
COB Lights

NON-ISOLATED DRIVERS (HPF)

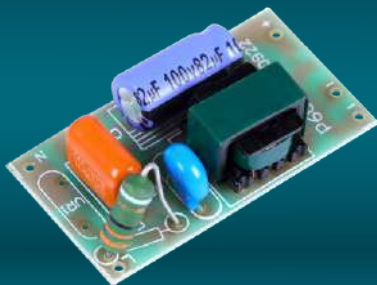

P6110

Wattage - 8-15W- 3 in 1 (P6110)

Input Voltage - 100V-300V

Output Voltage - 24V - 48V

Output Current - 300mA

Efficiency - $\geq 85\%$

PFC - > 0.95

Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 44.25*24.15*13mm

Application - LED Panel, Downlight, COB Light

NON-ISOLATED DRIVERS (HPF)



P4872

Wattage - 8-24W 3 in 1 (P4872)

Input Voltage - 100V-300V

Output Voltage - 24V - 78V

Output Current - 300mA

Efficiency - $\geq 85\%$

PFC - > 0.95

Surge Protection - Upto 3KV

THD - Less Than 15%

Length(mm) - 45.*24*15mm

Application - LED Panel, Downlight, COB Light



LED Lighting Solutions



+91 8655 500032



+91 8655 500031



sales.lightronics@gmail.com



www.lightronics.in



Gala No. 9,
Real Industrial Estate No. 5,
Sativali, Vasai East, 401208