


POTTED ISOLATED DRIVERS

ISOLATED DRIVERS

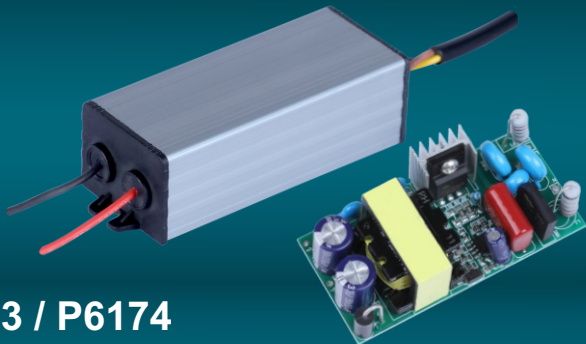

P6173 / P6174

Wattage - 50W EE28 (P6173 / P6174)

Input Voltage - 100V - 320V AC 50-60Hz

Output Voltage - 28V - 35V / 48V - 66V

Output Current - 1500mA / 750mA \pm 5%

Efficiency - \geq 85%

PFC - $>$ 0.95

THD - $<$ 10%

Surge Protection - 6KV

Features - Short Circuit Protection, OVP,
Over Load Protection


Over Temperature Protection - 105°C

Cutoff Over Voltage Protection - 310V AC

Size (Open Circuit) (L*B*H*) - 70.*33*22mm / 81.*37*27mm

Applications - Indoor / Outdoor LED Lighting

ISOLATED DRIVERS

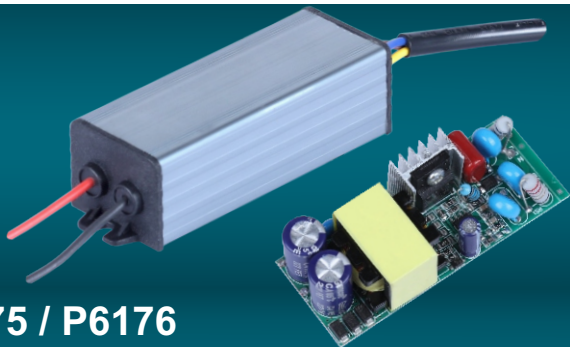

P6175 / P6176

Wattage - 50W EE22*13 (P6175 / P6176)

Input Voltage - 100V - 320V AC 50-60Hz

Output Voltage - 28V - 35V / 48V - 66V

Output Current - 1500mA / 750mA \pm 5%

Efficiency - \geq 85%

PFC - $>$ 0.95

THD - $<$ 10%

Surge Protection - 4KV

Features - Short Circuit Protection, OVP,
Over Load Protection

Over Temperature Protection - 105°C

Cutoff Over Voltage Protection - 310V AC

Size (Open Circuit) (L*B*H*) - 64*27*18mm / 78*36*24

Applications - Indoor / Outdoor LED Lighting




Lightronics
LED Lighting Solutions

 +91 8655 500032

 +91 8655 500031

 sales.lightronics@gmail.com

 www.lightronics.in

 Gala No. 9,
Real Industrial Estate No. 5,
Sativali, Vasai East, 401208