





Lighttronics
LED Lighting Solutions



Isolated Drivers

Isolated Drivers



P6127

Wattage -	4-7W (P6127)
Input Voltage -	100V-300V
Output Voltage -	10V - 21V
Output Current -	300mA
Efficiency -	≥ 75%
PFC -	> 0.5
Surge Protection -	Upto 3.5KV
THD -	Less Than 15%
Length(L*B*H*) -	28.5*21.5*18mm
Application -	Led Panel, Downlight & COB

Isolated Drivers



P5026

Wattage -	3W (P5026)
Input Voltage -	85V-265V
Output Voltage -	6V - 11V
Output Current -	240mA
Efficiency -	≥ 80%
PFC -	> 0.5
Surge Protection -	NA
Length(L*B*H*) -	24*17*14mm
Application -	Panel Lights, Downlight, COB Lights


Isolated Drivers



P5027

Wattage -	8-12W(P5027)
Input Voltage -	85V-300V
Output Voltage -	24V - 40V
Output Current -	300mA
Efficiency -	≥ 85%
PFC -	> 0.5
Surge Protection -	Upto 2.5KV
Length(L*B*H*) -	43.5*17.5*15.5mm
Application -	Panel Lights, Downlight, COB Lights

Isolated Drivers

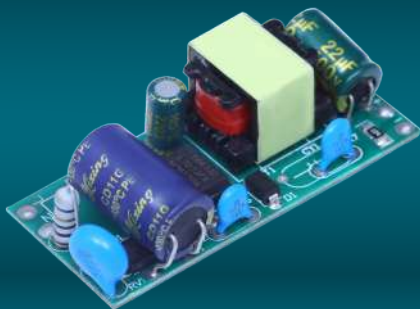

P5028

Wattage -	12-18W(P5028)
Input Voltage -	85V-300V
Output Voltage -	36V - 60V
Output Current -	300mA
Efficiency -	≥ 85%
PFC -	> 0.5
Surge Protection -	Upto 2.5KV
Length(L*B*H*) -	51.5*23*15.5mm
Application -	Panel Lights, Downlight, COB Lights

Isolated Drivers



P5029

Wattage -	18-24W(P5029)
Input Voltage -	85V-300V
Output Voltage -	54V - 80V
Output Current -	300mA
Efficiency -	≥ 88%
PFC -	> 0.5
Surge Protection -	Upto 2.5KV
Length(L*B*H*) -	51.5*23*17mm
Application -	Panel Lights, Downlight, COB Lights